


smartXS

smartXS is compact and robust 'Access and Time Attendance' system. In current scenario where security requirements are becoming stringent, we provide different access control and Identification systems to meet modern security needs. The systems are reliable, robust, easy to install with minimum support.

Key Features

- Stores from 2000 to 10,000 Cards & from 6000 to 30,000 Event buffers.
- Configurable card or fingerprint verification for logging in to the device for extra security.
- Email sending facility through Controller in offline mode in case of critical events like Unauthorized access, fire etc.
- Data can be Downloaded on the software by mapping the IP address of the controller making it more secure.
- Duress card implementation for enhanced security.
- Door Configuration from Standalone to Multi-door applications.
- HID Compatible (HID PROX 125 KHZ and HID iCLASS 13.56 Mhz Smart Card Technology).
- Advanced access control features like Anti-passback, Facility Code, and Time Zones.

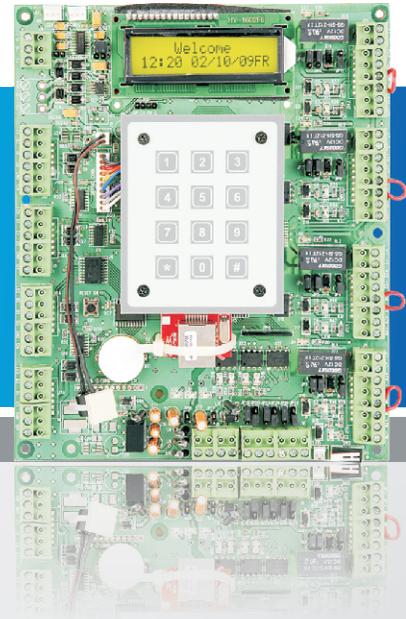

application areas

- Banks
- Government Sectors
- Physical Access Control

Benefits:

- Easy to configure and install
- Supports Proximity/Smart card/HID readers.
- User-friendly Access Management Software.
- Minimum support required.

Software Features:

- User-friendly software GUI.
 - Advanced Shift Management and Attendance Features.
 - Access Control Configuration (Doors, Time Zones, Door Open Time, DOTL etc.)
 - Cater to the needs from Small offices & Single location to Multi-Company, Multi-location & Multi-Divisions.
 - Payroll Interface for any payroll package.
 - Various versions: smartSOFT™ Classic/Professional Plus/Advance/Enterprise.
- (Visit www.smartisystems.com for more details)

Specifications	SM212 Series	SMN230 Series	SMN430 Series
System Features			
Memory	128 KB	512 KB (Flash)	
Door Control		2	4
Number of Readers		2	4
Control Relay Output		2	4
Event Buffers	6000	30,000	
Card Buffers	2000	10,000	
Reader Interface	26/32/34/35 Wiegand		
Input Points	1 Fire Input		
LCD	RS485 / RS232	YES	
Keypad	12 Key Numeric		
Inputs/Outputs	2 I/p (Door Status, Egress), 2 O/p (DOTL, Lock)	2 I/p (Door Status, Egress), 2 O/p (DOTL, Lock)	4 I/p (Door Status, Egress), 4 O/p (DOTL, Lock)
Communication ports	Rs485 / RS232	TCPIP	TCPIP
Controller ID	Upto 32	Upto 128	
Baud rate	9600bps (Default)		
Power Supply	12v DC-2A max	12v DC-5A max	
Color	Siemens Grey		
Battery Backup Power Supply	Optional	In-built	
Biometrics Connectivity	Yes (Wiegand)		
Approval	CE		
Access Control Features			
Facility Code	Available		
Time Zone / Access Levels	7 + 1(Free Time Zone)/Unlimited	63 + 1(Free Time Zone)/Unlimited	
Anti-Passback	Local	Hard, Soft, Escort, Userwise	Hard, Soft, Areawise, Escort, Userwise
Holiday Settings	42		
Time Zone Slots	Single Slot per day	4 Slots per day	
Security Features			
Duress card	Not Available	Available	
Data Download Security	Not Available	Available	
Accessibility to Menu Functions	Not Available	Configurable	
Secured Admin Login	Available using keypad	Available using card	
Software Required			
Access Management Software	SRMS Series	SSE Series (New)	
Attendance/Reporting Soft. (Opt)	Classic; Professional Plus; Advance	Professional Plus; Advance; Enterprise	

*Specifications and features are subject to change without prior notice.



Under HID Connect Partner Program

119, Neha Industrial Estate, Dattapada Road, Borivali (E), Mumbai - 400066
 Tel.: +91 22 4074 4444 / 2870 4141 Telefax: +91 22 4074 4455
 Email: enquiry@smartisystems.com Visit us at: www.smartisystems.com



www.smartisystems.com